Elara™ 6636 | SALON™ SPA

If you enjoy soaking in a warm, soothing tub surrounded by gently moving water, or if you prefer an invigorating foot and back massage, the Elara™ tub is right for you.

FEATURES:

- Multi-speed motor
- 4 fully adjustable TheraPro® jets
- 8 AccuPro™ back and foot jets
- 900 watt variable speed heated air blower
- Bottom air channels for maximum massage
- Chromatherapy™ lighting system capable of 256 colors
- All-in-one electronic control panel
- Drain-assist purge system
- Flexible drop-in or undermount installation options
- RapidHeat™ inline heater
- Low profile deck
- PrO$_3$™ Cleansing System

Elara™ 6636
SALON™ SPA with CHROMATHERAPY

MODEL NUMBER:
DX60 (Right-hand)

EXTERIOR DIMENSIONS:
66" long x 36" wide x 26" high

 # OF JETS/TYPE OF JETS:
4 TheraPro™
6 AccuPro™ Back Jets
2 AccuPro™ Foot Jets

OPERATING GALLONS:
75-83 gallons

Elara™ 6636
SALON™ SPA

DX60	Elara™ 6636 Salon™ Spa with Chromatherapy — Right Hand

- Right Hand Drain Location
- Accessories / Hardware:
  - TheraPro™ Jet Rings Kit: #D095
  - AccuPro™ 2 Jet Rings Kit: # P556
  - Sch 40, Rotary Drain Kit: #DA34
- Trim Kit Finishes Available:
  - (827) – Chrome
  - (898) – Brushed Chrome
  - (815) – Satin Nickel
  - (829) – Bright Brass
  - (805) – Platinum
  - (826) – Brushed Nickel
  - (845) – Oil Rubbed Bronze

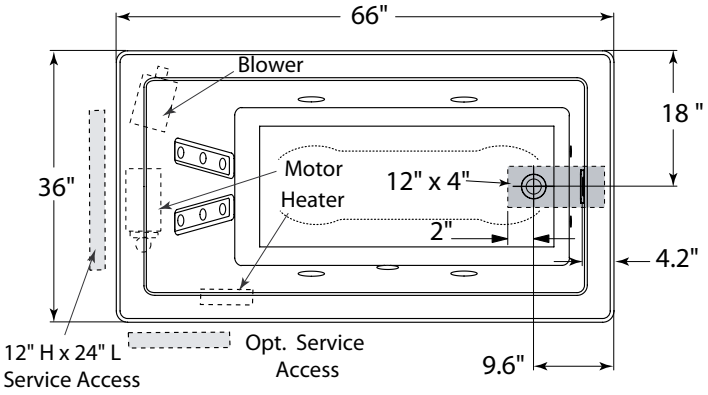

Product Shown: Elara™ 6636 Salon™ Spa with Chromatherapy Right Hand Model: DX60

** Measurements inside unit represent cutout in floor to allow for drain/overflow.*

Minimum Service Access dimensions given.

INSTALLATION NOTES

Refer to installation instructions included with fixture before beginning installation. Please confirm product availability and specifications before commencing with any installation work.

PRODUCT SPECIFICATIONS AND AVAILABILITY ARE SUBJECT TO CHANGE WITHOUT NOTICE.

Technical Specifications

DIMENSIONS
66" L x 36" W x 26" H
(1676 mm) L x (914 mm) W x (660 mm) H

DRAIN/OVERFLOW
A: 18-1/2" (470 mm) B: 9.6" (244 mm)

CUTOUT
64" (1626 mm) x 34" (864 mm) & undermount template DQ51000

TOTAL WEIGHT
847 lb. (384 kg) / 51.3 lb/ft^2 (250 kg/m^2)

OPERATING GALLONAGE
79 U.S. Gal. (299 Liters)
Min. 75 U.S. Gal. (284 liters)
Max. 83 U.S. Gal. (314 liters)

PRODUCT WEIGHT
164 lb. (74 kg)

SKIRT MOUNTING
Not Available

ELECTRICAL SPECIFICATIONS
Requires a dedicated GFCI protected separate circuit.
Blower: 120VAC, 20AMP, 60 Hz.
Motor/Pump and RapidHeat™: 240VAC, 20AMP, 60 Hz.

HEATER (STANDARD)
Requires a dedicated GFCI protected separate circuit.
RapidHeat™: P/N BN60000



SIDE VIEW

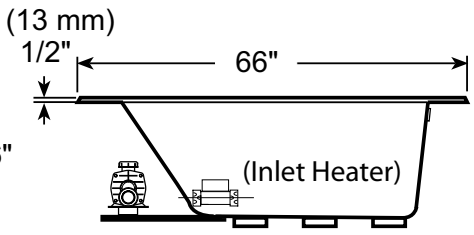

END VIEW



DRAIN/OVERFLOW